


GATOR Cone Crusher

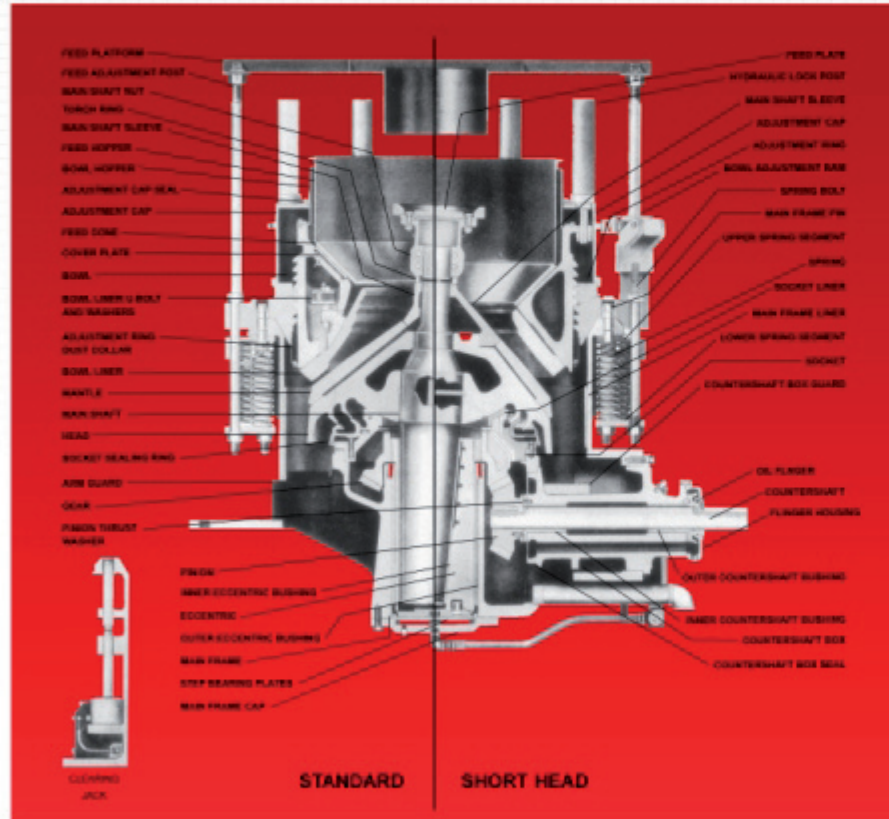

TYPICAL AGGREGATE PRODUCT GRADATIONS

FEED MATERIAL RATING - AVERAGE/HARD
 Open Circuit Product Analysis* (% Passing)
 for Given Closed Side Setting of Crusher

Product Size Inch (mm)	Closed Side Setting of Crusher, Inch (mm)							
	1/4" (6 mm)	3/8" (10 mm)	1/2" (13 mm)	3/4" (19 mm)	1" (25 mm)	1-1/4" (32 mm)	1-1/2" (38 mm)	2" (51 mm)
4" (102 mm)								100
3" (76 mm)							100	91
2-1/2" (64 mm)						100	95	82
2" (51 mm)					100	93	86	70
1-1/2" (38 mm)				100	92	80	70	51
1-1/4" (32 mm)				95	82	70	57	41
1" (25 mm)			100	86	70	54	44	32
3/4" (19 mm)		100	92	70	51	39	32	25
1/2" (13 mm)	100	86	70	44	32	26	22	17
3/8" (10 mm)	94	70	51	32	25	20	17	13
1/4" (6 mm)	70	44	32	22	17	14	12	9
3/16" (5 mm)	50	32	25	17	13	11	9	7
No.6 (3 mm)	34	23	18	12	10	8	7	5
No.8 (2 mm)	25	17	13	9	7	6	5	4

* Note: These table values will vary with the method of feeding, selection of crusher cavity, the weight, cleanliness and moisture contents of the material and its fracture pattern. Accurate values should be established by actual testing.